


 I P42 Class I & II (VI)

Universal 100 Watts - UES100B-SPCZ
Universal 100 Watts - UES100C-SPCZ

Product Features

- Meets medical & I.T.E. safety
- 2 MOPP input to output isolation
- Leakage current $\leq 100\mu\text{A}$
- Energy efficiency level VI
- $\leq 0.15\text{W}$ standby power
- 5V/9V/12V/15V/20V outputs, up to 100W
- Up to 5,000m operating altitude
- GaN technology
- Meet USB PD3.1&PD3.0&QC4.0+&QC3.0&QC2.0 fast charge agreement



NEW

UES100B-SPCZ
UES100C-SPCZ


Models & Parameters

Model Number	Voltage ^(*) (V)	Current (A)	Rated Power	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES100B-SPCZ UES100C-SPCZ	5.0	0.01-3.00	15.00W	200mVpk-pk	$\pm 5\%$	Line: $\pm 1\%$ Load: $\pm 5\%$	82.0%	$\leq 3\text{s}$
	9.0	0.01-3.00	27.00W	200mVpk-pk	$\pm 5\%$		86.8%	$\leq 3\text{s}$
	12.0	0.01-3.00	36.00W	200mVpk-pk	$\pm 5\%$		87.5%	$\leq 3\text{s}$
	15.0	0.01-3.00	45.00W	200mVpk-pk	$\pm 5\%$		88.0%	$\leq 3\text{s}$
	20.0	0.01-5.00	100.00W	250mVpk-pk	$\pm 5\%$		89.0%	$\leq 3\text{s}$

Model encoding:

Replace "Z" with "1" for C8 (Class II), "2" for C6 (Class I), "3" for C14 (Class I), "4" for C18 (Class II) AC inlets
 UES100B-SPCZ with Output terminal Type-C, UES100C-SPCZ with DC cable

Mechanical Details

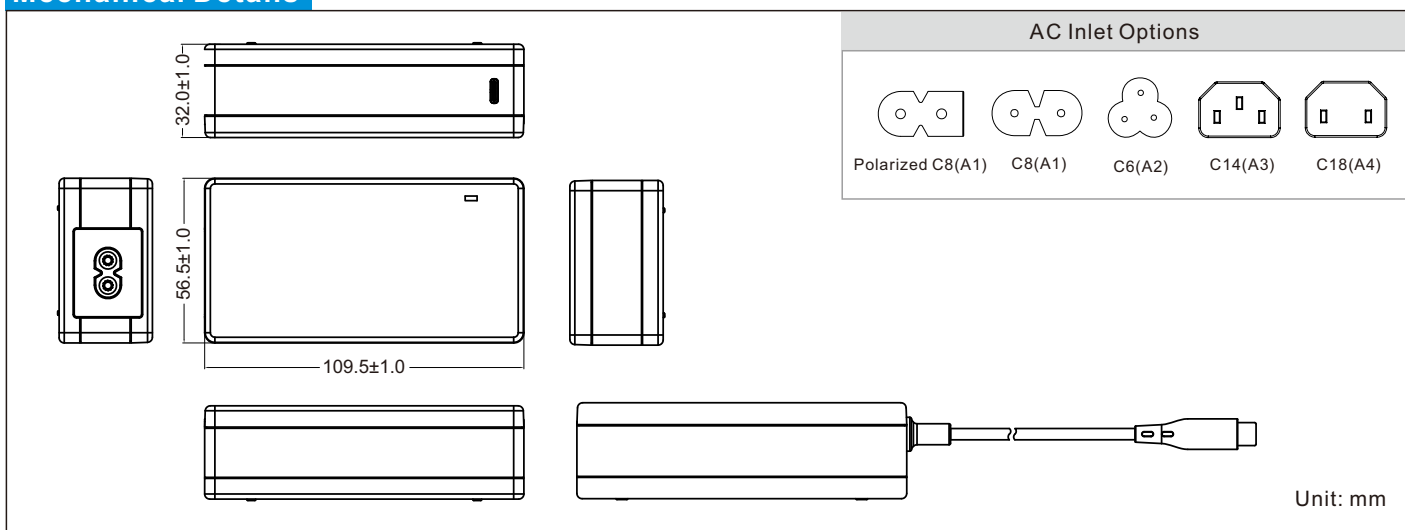

Notes

(*1) Other options are available, please contact our sales representative for details.

Input

Input Voltage Range	80-264VAC
Frequency Range	47-63Hz
Input Current	1.5A max at 80VAC
Touch Leakage Current ^(max)	≤ 100μA at 264VAC

Environmental

Operating Temperature	-10°C to 40°C
Storage Temperature	-40°C to 80°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

General

Dimensions	109.5(L)x 56.5(W)x32(H)mm
Weight	300g±10g
MTBF	>100,000hrs MIL-HK8K-217 at 25°C

Protection

Overload	105-140% rated output power, auto recovery
Over Voltage	110-130% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

Safety Meet

Safety Agency / Mark	Medical	ITE
CB	IEC60601-1/IEC60601-1-11	IEC62368-1
UL	ANSI/AAMI ES60601-1/60601-1-11	UL62368-1
TüV-SUD/Mark	CAN/CSA-C22.2 NO. 60601-1	CAN/CSA C22.2 NO.62368-1
CE	EN60601-1/60601-1-11	-
	-	EN62368-1

EMC

Emission	Medical	ITE
Conduction	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR 32
Radiation	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN60601-1-2	EN55035, CISPR 35
ESD	IEC61000-4-2	±15KV air, ±8KV contact
Radiated Immunity	IEC61000-4-3	3V/m 80MHz - 2.7GMHz
EFT/Burst	IEC61000-4-4	±2KV on AC port, ±1KV on signal ports
Surge	IEC61000-4-5	±1KV line to Neutral, ±1KV line/Neutral to GND
Conducted Immunity	IEC61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	IEC61000-4-8	30 A/m
Dips & Interruptions	IEC61000-4-11	0%, 70%, 0% of UT

Others

Dielectric Withstand Voltage	5,656VDC input to output
Insulation Resistance	100M Ohms, 500VDC input to output